


Tehnički list za artikl: SR1D24281S

SORAX ventilirana vrata, Š=800xV=2.000mm, RAL7035

Kut otvaranja vrata 180° (u ravnini), kompatibilna za montažu TANlock3 ili TANlock1 zakretne ručice

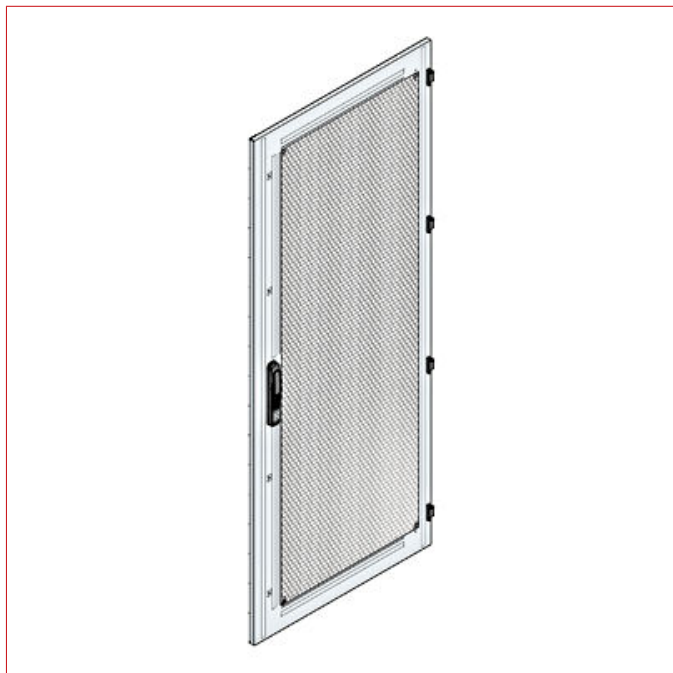

Info o proizvodu

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL7035


Tehnički podaci

Neto širina (mm)	800,00
Neto visina (mm)	2.000,00
Neto dubina (mm)	25,00
EAN	9004840997217

Tehnički podaci - nastavak

CIJENA	233,80
Boja	RAL 7035
Tip proizvoda	Ventilated steel sheet door

Mjerne skice: SORAX ventilirana vrata, Š=800xV=2.000mm, RAL7035

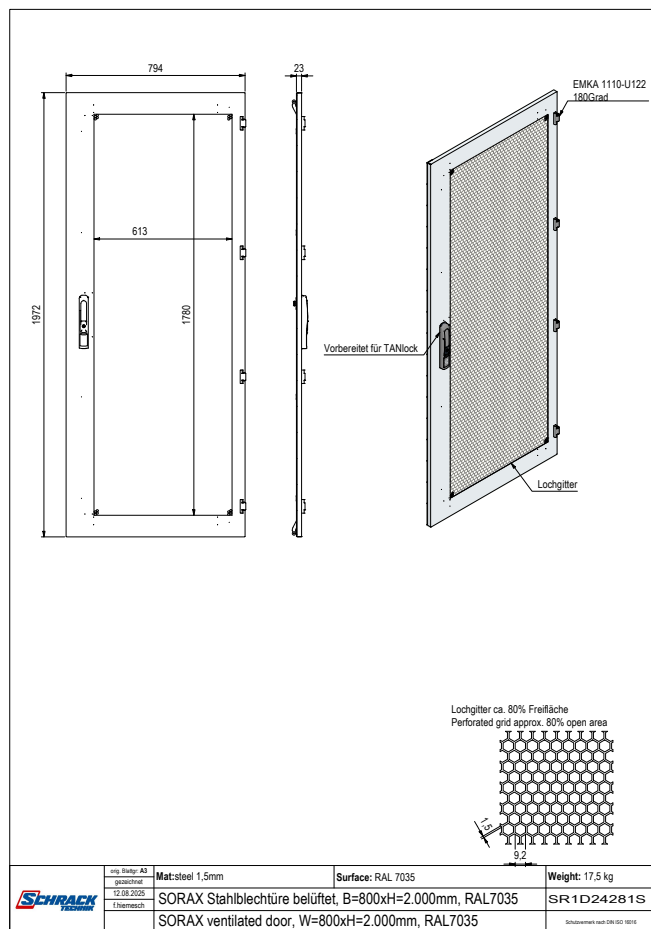

OPIS	KAT. BROJ
SORAX ventilirana vrata, Š=800xV=2.000mm, RAL7035	SR1D24281S
Kut otvaranja vrata 180° (u ravlini), kompatibilna za montažu TANlock3 ili TANlock1 zakretne ručice	