

Tehnički list za artikl: WST1212402

Zidni ormar, metalni, 2 vrata, IP54, 1200x1200x400 (VxŠxD)

čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x prirubnica 505x119mm (ŠxD)



SCHRACK info

- Material: Solid, cross-shaped construction, which is folded and welded from a cold-pressed sheet steel plate regardless of the size of the enclosure.
- The enclosure consists of two parts: Body and door.
- Gland plates: 1.4mm powder coated sheet steel. The body front of the enclosure is a double-edged rain gutter to allow water to drain. The enclosure can be rotated by 180°, so the cable entry is possible via gland plate openings in the base or at the top. 4 wall mounting holes with 8.5mm diameter arranged in the corners of the rear wall. All mounting holes have 20mm edge distance. All parts are pre-treated with iron phosphate, demineralised and protected by an epoxy-polyester powder-structure coating in RAL7035.
- The door is secured by hinges and has an opening angle of 130°. The door is mounted using safety pins and the hinges are hidden. The door hinge can be changed easily from right to left. The doors have a foamed polyurethane seal.
- Mounting plate: Galvanised sheet steel, 2mm, folded on all sides. The mounting plate folded on all sides is mounted on welded M8 bolts on the rear of the enclosure and can be removed for mounting and wiring. The mounting plate is made of 2mm sendzimir galvanized sheet steel to comply with EMC guidelines. It has earthing points to establish a connection to the enclosure body.
- Protection class: Maximum protection for the devices is guaranteed due to the high degree of protection and impact resistance IK10 according to IEC 60529 standards. Corrosion protection for additional drilling should be considered.


- Mounting: The enclosure is mounted to the wall with screws (with plastic washers inside) directly with the rear wall or with a mounting kit (accessory WSTWB004 / WSTWB006), in both cases the IP degree of protection is maintained. The small opening radius of the doors makes it easy to mount enclosures directly next to each other.
- Delivery includes: Complete enclosure with gasket and screws, keys DIN 5mm and mounting plate incl. mounting material. Grounding possibilities are given.



Tehnički podaci

Neto širina (mm)	1.200,00
Neto visina (mm)	1.200,00
Neto dubina (mm)	400,00
Neto masa (kg)	91,41
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Tip	Zidni, čelični lim
Visina (mm)	1200
Širina (mm)	1200
Dubina (mm)	400
Maksimalna opteretivost (kg)	235
Debljina stijenke tijela (mm)	1,50
IP stupanj zaštite	IP54
Montažna ploča	Pocinčani čelični lim 2mm
Opteretivost montažne ploče (kg)	190
Debljina montažne ploče (mm)	2
Visina montažne ploče (mm)	1140
Širina montažne ploče (mm)	1140
Broj vrata	2
Opteretivost vrata (kg)	30
Broj prirubnica	2
Debljina stijenke vrata (mm)	2
Ojačanje vrata	Da (sadržano)
Brava	Zakretna ručica
Šarke	6
Tip prirubnice	F
Širina prirubnice (mm)	505
Dubina prirubnice (mm)	119
Pričvršćenje stražnje ploče	6
Boja	RAL 7035 (svijetlo siva)
Disipacija snage (W)	-684,00
Klasa zaštite	I

Dimenzije

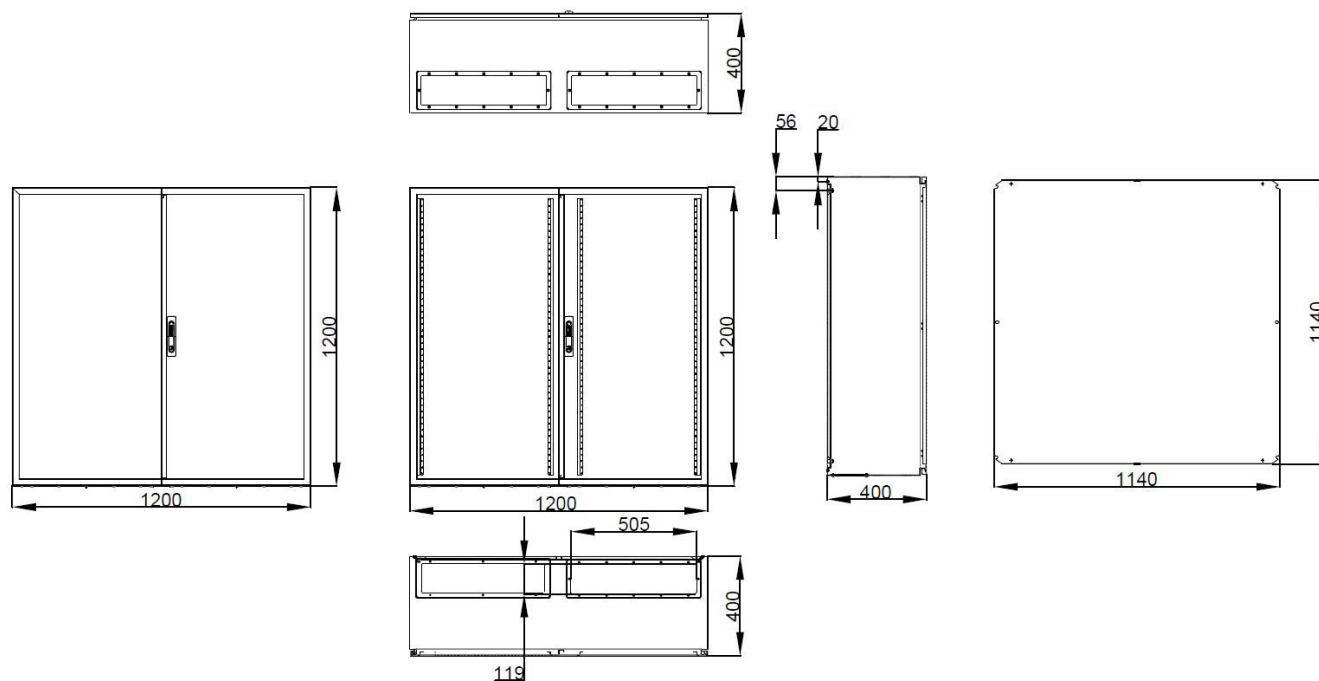

Tablica artikla

OPIS	KAT. BROJ
Zidni ormar, metalni, 2 vrata, IP54, 1200x1200x400 (VxŠxD) čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x priрубnica 505x119mm (ŠxD)	WST1212402
Dodatni pribor	
Zidni nosači za WST ormare visine 1000mm i više, pocinčani pakiranje = 6 komada	WSTWB006
Bakreni vodič za uzemljenje (pletенica) duljine 260mm	WSTCUF260
Zakretna ručica sa tipkom za WST ormare odgovara za: WST1206300, WST1208300, WST1208400, WST1210302, WST1212302, WST1212402, WST1410302	WSTS3531
Zakretna ručica za polucilindar 40mm, IP65 s pokrovom za polucilindar bravu, crna	IU001225
Zakretna ručica za polucilindar 45mm, IP65 s pokrovom za polucilindar bravu, crna	IU001226
Zakretna ručica 1125-U 186 za polucilindar 40mm, IP40	IU001903
Ventilacijska priрубnica za WST ormare, 505x119mm (ŠxD) priрубnica tip F	WSTVF003
Priрубnica za uводnice WST sa 27xM16, 5xM20, 4xM25, 2xM32 priрубnica za WST ormare, s otvorima: 27xM16, 5xM20, 4xM25, 2xM32, 505x119mm (ŠxD), poklopci za sve otvore sadržani u WSTFA0F1 isporuci, RAL 7035	
Priрубnica za uводnice WST sa 18xM16, 14xM20, 3xM25, 1xM32 priрубnica za WST ormare, s otvorima: 18xM16, 14xM20, 3xM25, 1xM32, 505x119mm (ŠxD), poklopci za sve otvore sadržani u WSTFA0F2 isporuci, RAL 7035	
Priрубnica za povezivanje WST ormara, 505x119mm (ŠxD) tip F, RAL7035	WSTVBF04
Kabelska uводnica Ø28mm - 6 kabelskih uвода kabelski uводи: 3x 3-4mm i 3x 5-9mm	WSTCEG2806
Kabelska uводnica Ø40mm - 10 kabelskih uвода kabelski uводи: 3x 5,5-14mm i 7x 2,5-7mm	WSTCEG4010
Kabelska uводnica Ø50mm - 8 kabelskih uвода kabelski uводи: 2x 3-7mm, 1x 12-21mm, 1x 7-15mm, 4x 4-10mm	WSTCEG5008
Kabelska uводnica Ø50mm - 7 kabelskih uвода kabelski uводи: 7x 8-12mm	WSTCEG5007