


Tehnički list za artikl: EV103004--

Umetak dimera, 400 W/VA, RC, 2-žični

Cover EV102013--

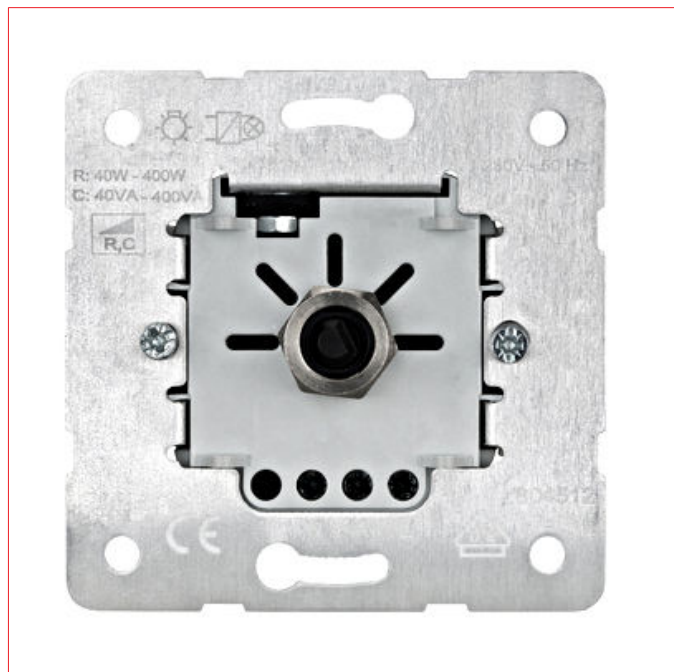

Schrack-Info

Phase cut rotary dimmer with on/off button for resistive or inductive loads. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Tip proizvoda	Dimer
Dimmertyp	Leading edge dimmer
Load type	Ohmic Capacitive
Dimmable illuminants	Low voltage halogen lamp with electronic transformer Incandescent lamp High voltage halogen lamp
Power range	40-400 W/VA
Radni napon AC (V)	230
Način ugradnje	Screws and claws
Način pričvršćenja	Flush-mounted

Tehnički podaci - nastavak


Operating temperature	0°C to +35°C
Safety function	Electronic short-circuit protection Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	U skladu s EN 60669-1
Priključni vodič	Fleksibilni s kabelskim završetkom (tuljak) Kruti Fleksibilni
Presjek priključnog vodiča (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Zaštita okoliša	Halogen free
Održivost	ROHS
Ispitna oznaka	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35

Dimmleistung


							
Min.	40 W	40 W	-	40 VA	-	-	-
Max.	400 W	400 W	-	400 VA	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

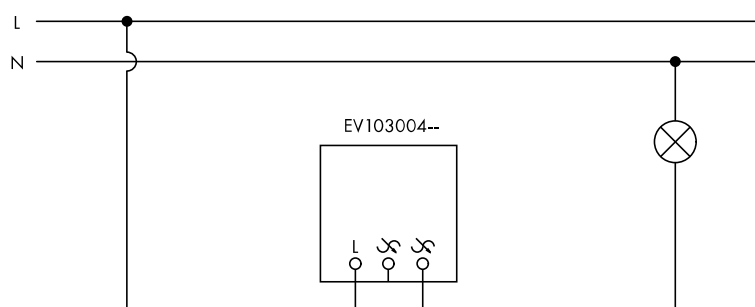

Abmessungen (mm)

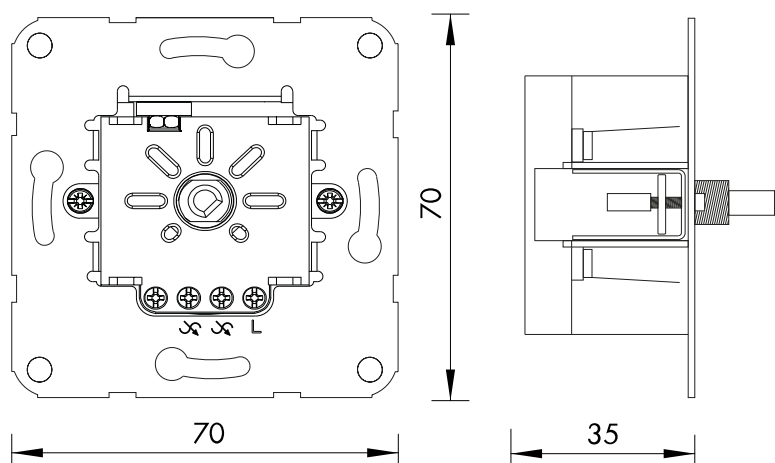

Tablica artikla

OPIS	KAT. BROJ
Umetak dimera, 400 W/VA, RC, 2-žični Cover EV102013--	EV103004