


Tehnički list za artikl: EV103002--

Umetak dimera, 300 W/VA, RLC, 2-žični

Cover EV102013--

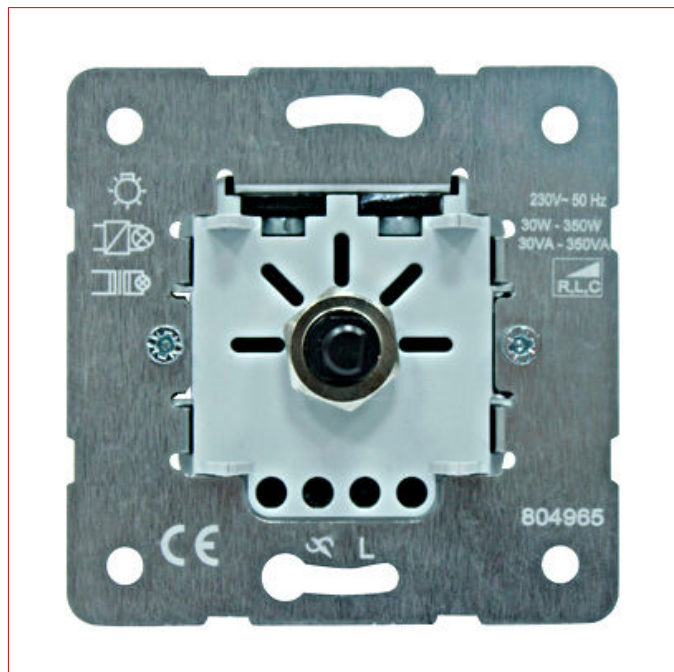

Schrack-Info

Universal rotary dimmer with on/off button for resistive, inductive or capacitive loads. The dimmer is equipped with automatic load detection, i.e. the dimmer adjusts the operating mode when the load is first connected. The memory function turns on the lamp (by pressing the knob) with the brightness it had before the last switch-off. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	03-VISIO 50
Dizajn	CLASSIC
Tip proizvoda	Dimer
Tip dimera	Universal-dimmer
Vrsta otpora	Ohmic Inductive Capacitive
Dimabilna rasvjetna tijela	Low voltage halogen lamp with electronic transformer Low voltage halogen lamp with conventional transformer Incandescent lamp High voltage halogen lamp

Tehnički podaci - nastavak

Raspon snage	20-300 W/VA
Radni napon AC (V)	230
Način ugradnje	Screws and claws
Način pričvršćenja	Flush-mounted
Radna temperatura	+5°C to +45°C
Zaštitna funkcija	Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	U skladu s EN 60669-1
Priključni vodič	Fleksibilni s kabelskim završetkom (tuljak) Kruti Fleksibilni
Presjek priključnog vodiča (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Zaštita okoliša	Halogen free
Održivost	ROHS
Ispitna oznaka	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35


Podatkovna tablica: Umetak dimera, 300 W/VA, RLC, 2-žični

							
Min.	30 W	30 W	30 VA	30 VA	-	-	-
Maks.	350 W	350 W	350 VA	350 VA	-	-	-


- 1 ... žarulje sa žarnom niti
2 ... halogene
3 ... konvencionalni transformator
4 ... elektronski transformator

- 5 ... dimabilne štedne žarulje CFL
6 ... dimabilne 230V LED
7 ... dimabilne 12V LED

Anschlussplan

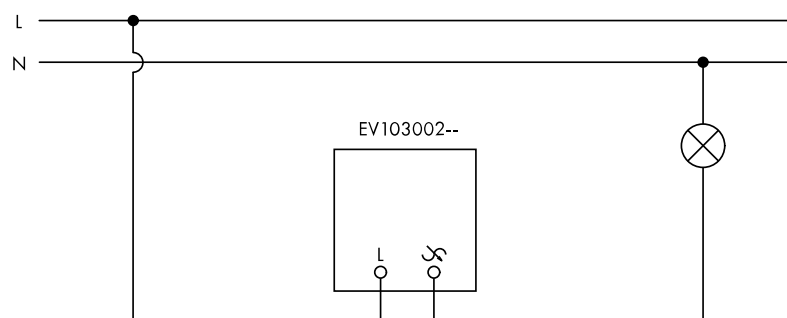

Abmessungen (mm)

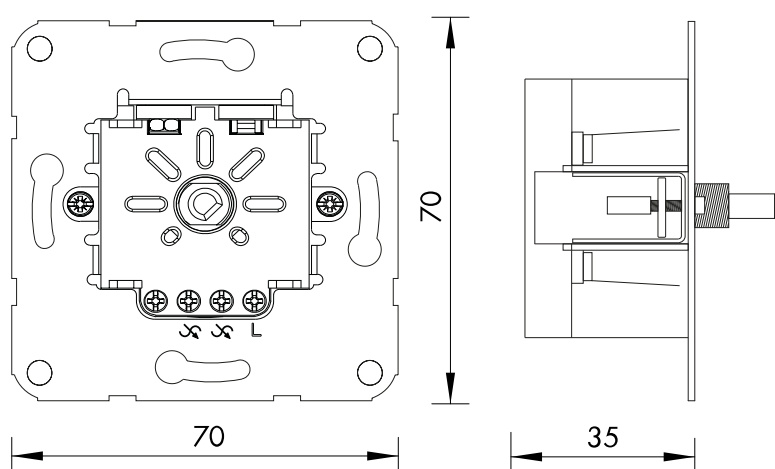

OPIS

KAT. BROJ

Umetak dimera, 300 W/VA, RLC, 2-žični

EV103002

Cover EV102013--