


Tehnički list za artikl: IL172242AS

N/Ž inst. razdj. 2A-42, 14-redni, 294 ŠM, 2025x590x250mm

14 Broj redova, 294 Modularnih širina, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand

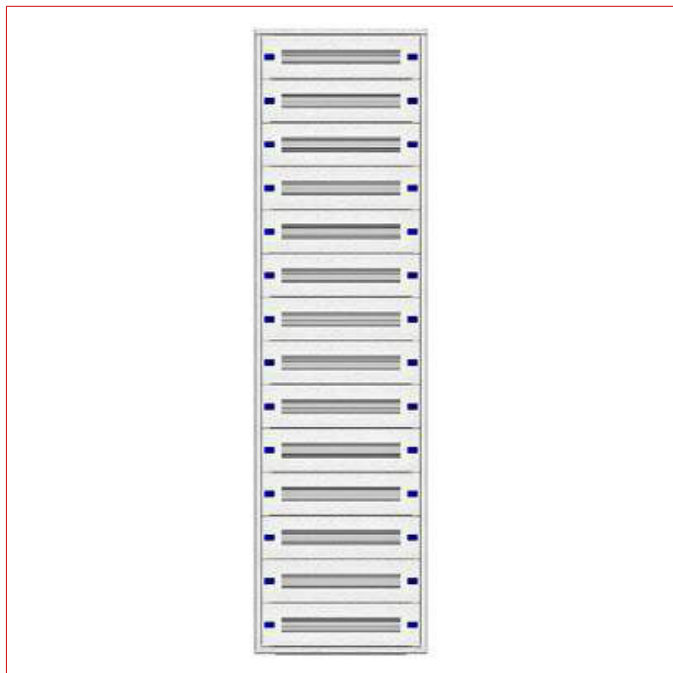

SCHRACK-Info

- Modular designed wall-mounted frame with door (single door)
- Material: 1.25mm powder coated sheet steel
- Type 2A-42K (2 unit-wide, wall-mounted enclosure, 42 Modul heights, front plates made of sheet steel)
- Dimensions: H=2025 W=590 D=250mm
- Number of gland plates: 1 gland plate above and below
- Cable entry slits with foam rubber gland plates as standard (for 2-5 unit-wide and 21-33 Modul-high enclosures the cable entry is on one side, starting from 39 Modul-high enclosure it is both on top and bottom)
- 14 installation rows each with 21 module widths (MW), a total of 294MW
- Sheet steel door with two flush plastic thumbturns operated via integrated double-bit lock
- Protection class: I
- Degree of protection: IP20C
- Impact resistance: IK08
- Color: RAL7035 (Light grey)



Tehnički podaci

Neto širina (mm)	590,00
Neto visina (mm)	2.025,00
Neto dubina (mm)	250,00
EAN	9004840631623
Disipacija snage (W)	-537,00
Tip	Nazidni razdjelnik s instalacijskim umetkom (komplet)
Austrijske pokrajine	Standard
Boja	RAL 7035 (svijetlo siva)
Širina brojila	2
Visinska jedinica	42
IP stupanj zaštite	IP20C
Klasa zaštite	I
Otpornost na udarce	IK08
Modularnih visina	42
Broj redova	14
Pokrovna ploča	Čelik
Osnovna oznaka	Distribution Board
Modularnih širina	294

Tablica artikla

OPIS	KAT. BROJ
N/Ž inst. razdj. 2A-42, 14-redni, 294 ŠM, 2025x590x250mm	IL172242AS
14 Broj redova, 294 Modularnih širina, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand	
Dodatni pribor	
Postolje za nazidne ormare dubine 250mm, bočni dijelovi visina 100mm, isporuka u paru (lijevi + desni bočni dio), mogućnost sastavljanja 2 postolja u postolje visine 200mm, primjenjivi kod IL091125 ormara u izvedbi IP20-C i IP54	
Postolje za nazidne razdj. M2000, prednji dio, 2PB, U-profil redizajnirani U-profil dubine 8 mm, 2 mm čelični lim	IL091200-S
Brava 61005 za "Modul" razdjelnike s jednim ključem	IL900200-F
Metalna cilindar brava H36000 za MODUL razdjelnike, 2 ključa s dva ključa	IL900202-F
Ploča za uvod kabela, 48 rupa 13-30mm, gumene uvodnice 426x130x15mm (ŠxVxD), za ormare IL001/006/009/036 širine 2,3, 4, 5. Kabelski prolazi: 28x13mm, 16x17mm i 4x30mm	IL900102

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Ploča za uvod kabela, 18 rupa 18-30mm, gumene uvodnice 440x130x33mm (ŠxVxD), za ormare IL001/006/009/036 širine 2, 3, 4, 5. Kabelski prolazi: 18x (18-30)mm	IL900105
Zidni nosači za sve nazidne razdjelnike Modul 2000	IL900020-F
Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva	BK002401
Pokrovna traka, slijepa, glatka, siva, duljine 1m pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi	IL900251
Z-metalna cilindar brava za MODUL razdjelnike, 2 ključa s dva ključa	IL900201-F