

Tehnički list za artikl: EV103003--

Umetak dimera, 400 W/VA, RL, 2-žični

Cover EV102013--



Schrack-Info

Phase angle rotary dimmer with on/off button for resistive or inductive loads. The built-in potentiometer can be used to set a basic brightness, i.e. a constant brightness value which is the same each time the unit is switched on. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Dizajn	CLASSIC
Tip proizvoda	Dimer
Dimmertyp	Trailing edge dimmer
Load type	Ohmic Inductive
Dimmable illuminants	Low voltage halogen lamp with conventional transformer Incandescent lamp High voltage halogen lamp
Power range	60-400 W/VA
Radni napon AC (V)	230

Tehnički podaci - nastavak


Način ugradnje	Screws and claws
Način pričvršćenja	Flush-mounted
Operating temperature	0°C to +35°C
Safety function	Short-circuit protection Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	U skladu s EN 60669-1
Priključni vodič	Fleksibilni s kabelskim završetkom (tuljak) Kruti Fleksibilni
Presjek priključnog vodiča (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Zaštita okoliša	Halogen free
Održivost	ROHS
Ispitna oznaka	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35

Dimmleistung


							
Min.	60 W	60 W	60 VA	-	-	-	-
Max.	400 W	400 W	400 VA	-	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

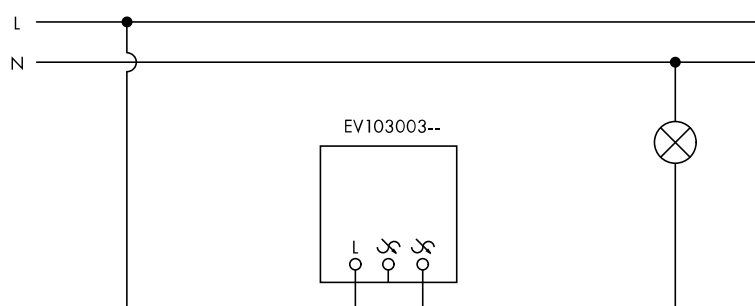

Abmessungen (mm)

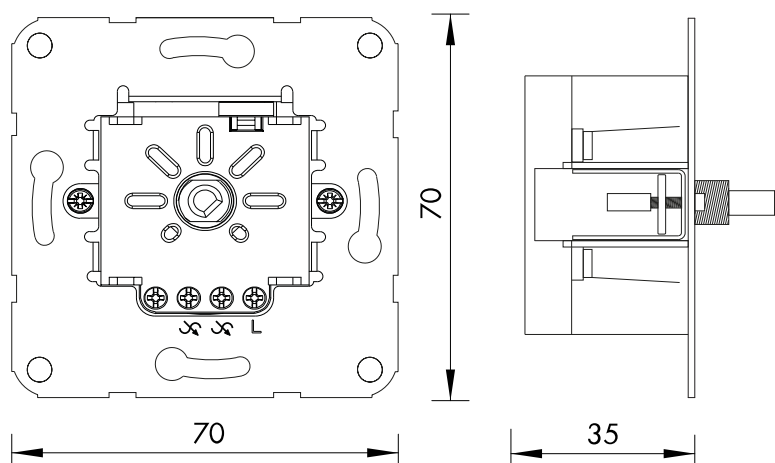

Tablica artikla

OPIS	KAT. BROJ
Umetak dimera, 400 W/VA, RL, 2-žični	
Cover EV102013--	EV103003
Dodatni pribor	
Pokrov/tipka dimera, bijela	EV102013
Pokrov/tipka dimera, antracit	EV112013
Pokrov/tipka dimera, srebrna	EV122013