

Tehnički list za artikl: EV211017--

Šuko utičnica s poklop.+izmjenična sklopka, horizontalna, IP54

nazidna, nazivna struja: 16A, na oprugu (utične priključne stezaljke)



SCHRACK info

Robust surface-mounted switch socket outlets Combination of durable and weather-resistant, fibreglass-reinforced thermoplastic material. Switch and socket are IP54 splash-proof and provide additional protection against dust. Furthermore, they are resistant to chemicals and elevated temperatures and at the same time have a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Tehnički podaci

Neto duljina (mm)	168,00
Neto širina (mm)	74,00
Neto visina (mm)	60,00
Neto masa (kg)	0,21
Serijski	VISIO IP54
Tip proizvoda	Switch
Radni napon AC (V)	230
Struja sklapanja (AX)	10

Tehnički podaci - nastavak

Način ugradnje	Nazidno
Način pričvršćenja	Vijak
IP stupanj zaštite	IP54
Boja	siva
Tip priključka	Utična stezaljka
Priključni vodič	Kruti
Presjek priključnog vodiča (mm ²)	1,5 und 2,5
Materijal	ABS Bakar
Zaštita okoliša	Halogen free
Održivost	ROHS
Ispitna oznaka	VDE
Dimenzije (mm)	168x74x56

Abmessungen (mm)

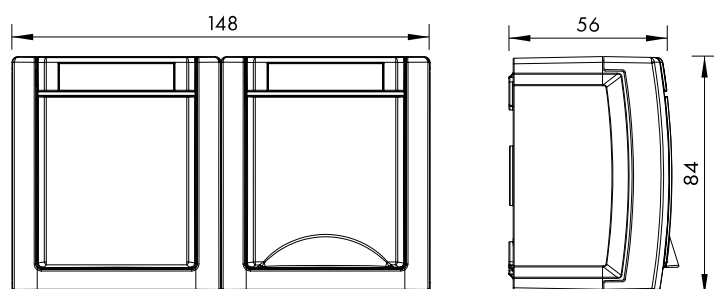

Tablica artikla

OPIS	KAT. BROJ
Šuko utičnica s poklop.+izmjenična sklopka, horizontalna, IP54 nazidna, nazivna struja: 16A, na oprugu (utične priključne stezaljke)	EV211017
Dodatni pribor	
Adapter za vertikalno proširenje VISIO IP54 sklopki/utičnica	EV217002
.	