






Tehnički list za artikl: HSELS043TG

Opt. razdjelnik, 4 niti, ST, 50/ 125µm OM3, 19", 1U, klase B

optički završeci umetnuti i pripremljeni za varenje, 19", 1U, RAL7035, klase B prema IEC 61753-1, PREMIUM

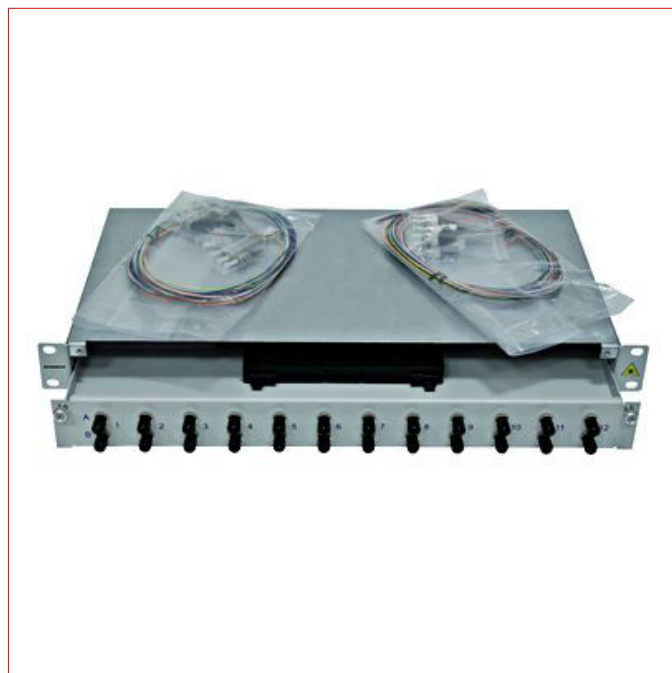

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open




Standards:

50173-1, EN 61300-3-6, EN 61300-3-36

Tehnički podaci

Neto širina (mm)	482,50
Neto visina (mm)	43,60
Neto dubina (mm)	211,50
Neto masa (kg)	2,70
Vlakno	multimodno 50/125µm OM3
Boja	RAL 7035 (svijetlo siva)
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	70
Broj vlakana	4
Spojnicica	ST

Dimension drawing

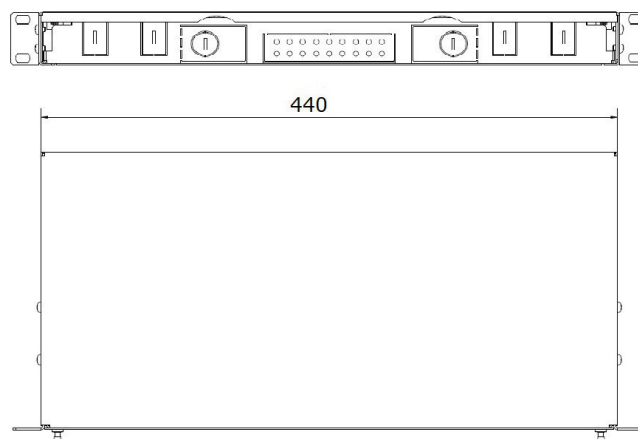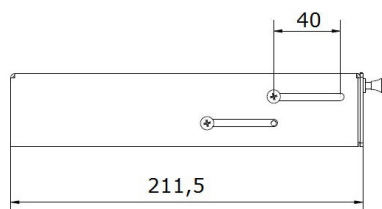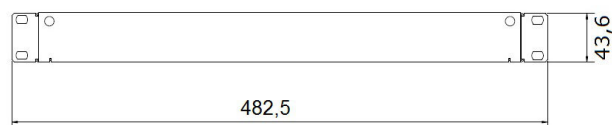

Tablica artikla

OPIS	KAT. BROJ
Opt. razdjelnik, 4 niti,ST,50/125µm OM3, 19", 1U, klase B	HSELS043TG
optički završeci umetnuti i pripremljeni za varenje, 19", 1U, RAL7035, klase B prema IEC 61753-1, PREMIUM	
Dodatni pribor	
Optička cjevčica za zaštitu spoja 60mm	HELSP00011
Optička cjevčica za zaštitu spoja 45mm	HELSP00010
Alat za čišćenje optičkih utikača SC, ST, FC i E2000	HSELSZT002
Pogodno za UPC i APC utikače. Više od 1000 ciklusa čišćenja.	
Mjerač snage s integriranim laserom (VFL) za optičke spojeve	HSELSZT003
PAŽNJA: ovo je izvor svjetla Laser klase 2. Nikada ne gledajte u izvor. Uvijek koristite pokrov na VFL portu kad nije u uporabi.	
Preporučujemo uporabu specijalnih naočala za rad s laserskim izvorima svjetla.	
Optički prespojni kabel DX ST/UPC-ST/UPC,50/125µm OM3,LS0H tirkizni, 2.0m	HLP23TT02F
Optički prespojni kabel DX ST/UPC-ST/UPC,50/125µm OM3,LS0H tirkizni, 5.0m	HLP23TT05F
Optički prespojni kabel DX ST/UPC-SC/UPC,50/125µm OM3,LS0H tirkizni, 2.0m	HLP23TC02F
Optički prespojni kabel DX ST/UPC-SC/UPC,50/125µm OM3,LS0H tirkizni, 5.0m	HLP23TC05F
Optički prespojni kabel DX LC/UPC-ST/UPC,50/125µm OM3,LS0H tirkizni, 2.0m	HLP23LT02F
Optički prespojni kabel DX LC/UPC-ST/UPC,50/125µm OM3,LS0H tirkizni, 5.0m	HLP23LT05F