


Tehnički list za artikl: HSKP4233D1

S/FTP kabel

cat.7, 4x2xAWG23/1, 1000MHz, LS0H-3, Dca, plavi

bubanj 1.000m

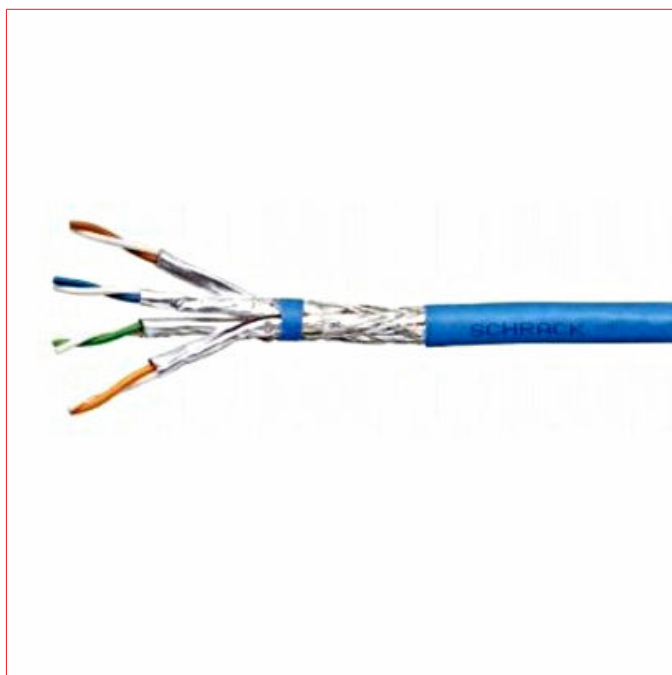

Tehnički podaci

Kategorija	Cat.7
Kabelski oklop	S/FTP
Izvedba vodiča	4 individual shielded pairs
Materijal vodiča	Solid bare copper AWG23/1
Boja	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Bit rate	10Gbit
Insulation material	Foamed polyethylene
Oklop	Oklopljen
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Solid tinned copper
Braid coverage (%)	30
Vanjski omotač kabela	LS0H-3

Tehnički podaci - nastavak

Plast/omotač	LSOH-3, FRNC according to: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Požarno opterećenje (kJ/m)	565
Outside diameter (mm)	7,2
Weight nominal (kg/km)	55
Boja	plava
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Temperature range - Operation (°C)	-20 to +60
Temperature range - Installation (°C)	+0 to +50
Bending radii cable - Static (Ø)	4
Bending radii cable - Dynamic (Ø)	8
Max. pulling tension (N)	110
Nazivni napon	< 72V DC and < 50V AC
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 2000
Capacitance unbalance pair to ground (pF/km)	< 1500
Loop resistance (Ω/km)	< 154
Resistance difference (%)	1
Signal propagation time (ns/m)	4,2
Coupling Resistance	10mΩ/m @ 10MHz
Coupling damping typical (dB)	80
Frequencies tested to (MHz)	1000
SKEW (ns/100m)	< 20
NVP (%)	79
Neto duljina (mm)	1.000,00
Neto masa (kg)	0,06
Neto promjer (mm)	7,20

Tablica artikla

OPIS	NVP (%)	KAT. BROJ
S/FTP kabel cat.7,4x2xAWG23/1,1000MHz,LS0H-3,Dca,plavi bubanj 1.000m	79	HSKP4233D1
Dodatni pribor		
PERFORMANCE LINE RJ45 modul oklopljen,cat.6a 10GB 4PPoE 100W (SFB)		HSPMRJ6G1A
PERFORMANCE LINE RJ45 modul oklopljen, klase Ea 10GB PoE+ (SFB)		HSPMRJ6G1T
TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFA (SFA)		HSEMRJ6GWA
TOOLLESS LINE modul RJ45 oklop., kl. Ea 10GB, 4PPoE 100W SFA (SFA)		HSEMRJ6GWT
TOOLLESS LINE utični modul RJ45 cat.6, oklopljen (SFA)		HSEMRJ6GWS
Nosač kabel. bubnja pri odmatanju,do 250kg,bubanj do 52cm		HTOOL00006
Čičak vezica crna 16mm x 4m		Q7KB0416-S
Čičak vezica plava 16mm x 4m		Q7KB0416-B
Čičak vezica crvena 16mm x 4m		Q7KB0416-R
Čičak vezica žuta 16mm x 4m		Q7KB0416-Y
Čičak vezica zelena 16mm x 4m		Q7KB0416-U