

Tehnički list za artikl: IUKTI6301A

Klima jedinica 1500W400V, djelomično ugradna, serija DTI

dubina ugradnje=72mm, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)


IUKTI6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Installation depth: 62mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


Tehnički podaci

Neto širina (mm)	418,00
Neto visina (mm)	962,00
Neto dubina (mm)	244,00
Neto masa (kg)	45,00
Min. temperatura okoline (°C)	15
Maks. temperatura okoline (°C)	55
IP stupanj zaštite	IP55
Klasa zaštite	I
Nazivni napon	400V-AC
Tip	Klima uređaj
Rashladni učinak (W)	1500

Kennlinien Kühleistung

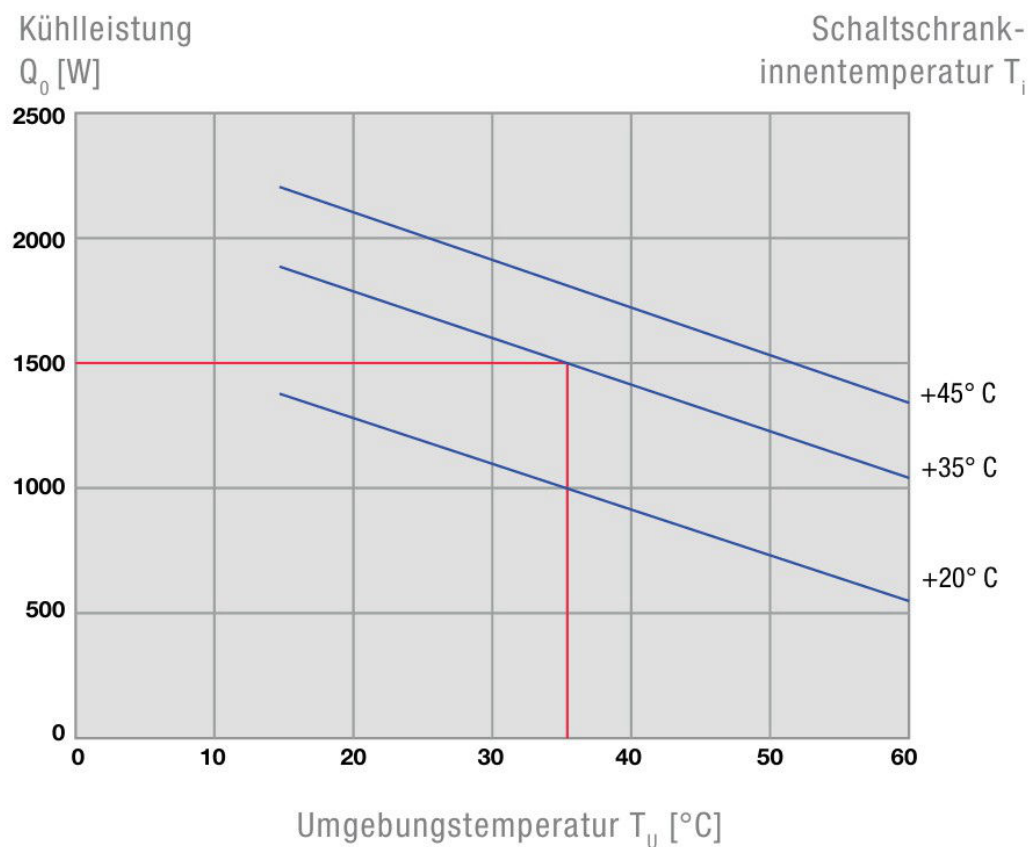

Dimensions and Cutout IUKTI6201A

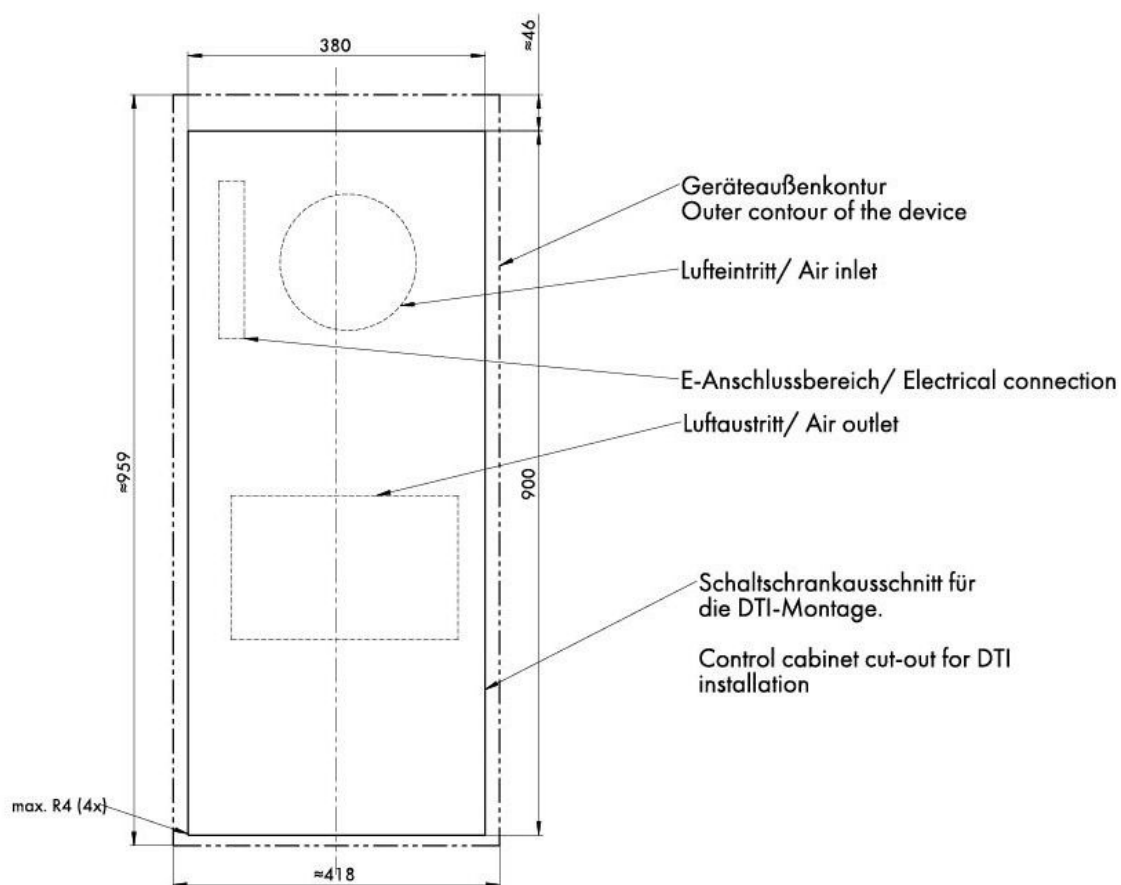

OPIS

KAT. BROJ

Klima jedinica 1500W400V, djelomično ugradna, serija DTI
dubina ugradnje=72mm, IP55, RAL 7035

IUKTI6301A