

Tehnički list za artikl: KCRC8060F-

Krović s ventilatorom (s filterom) 540m³/h, 800x600mm (ŠxV)

Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX208060 i outdoor ormar KCOX208060




SCHRACK-Info

- **Material:** 2 mm aluminium sheet, epoxy polyester powder-coated
- **Color:** RAL7035 (Light grey)
- **Dimensions:**
 - Width: 800 mm
 - Depth: 600 mm
 - Height: 100 mm
 - Net weight: 13.90 kg
- **Filter fan:** Integrated, air flow rate 540 m³/h
- **Compatibility:** Suitable for:
 - KCIX208060 (stainless steel enclosure)
 - KCOX208060 (outdoor enclosure)
- **Mounting:** The existing roof panel must be removed. The rain canopy is then screw-mounted in its place. No modification to the enclosure required
- **Operating temperature:** -40 °C to +80 °C
- **Application:** Outdoor use, weather-protected by closed roof design with integrated ventilation
- **Delivery includes:** Outdoor rain canopy with preassembled filter fan. Delivered individually, without enclosure.

Tehnički podaci

Neto širina (mm)	800,00
Neto visina (mm)	100,00
Neto dubina (mm)	600,00
Neto masa (kg)	13,90
Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	80
IP stupanj zaštite	IP54
Materijal	Aluminij
Boja	RAL 7035 (svijetlo siva)
Kapacitet hlađenja sa izlaznim filterom IP54 (W/K)	174
Snaga ventilacije IP54 (m ³ /h)	540

Dimensioned Drawing

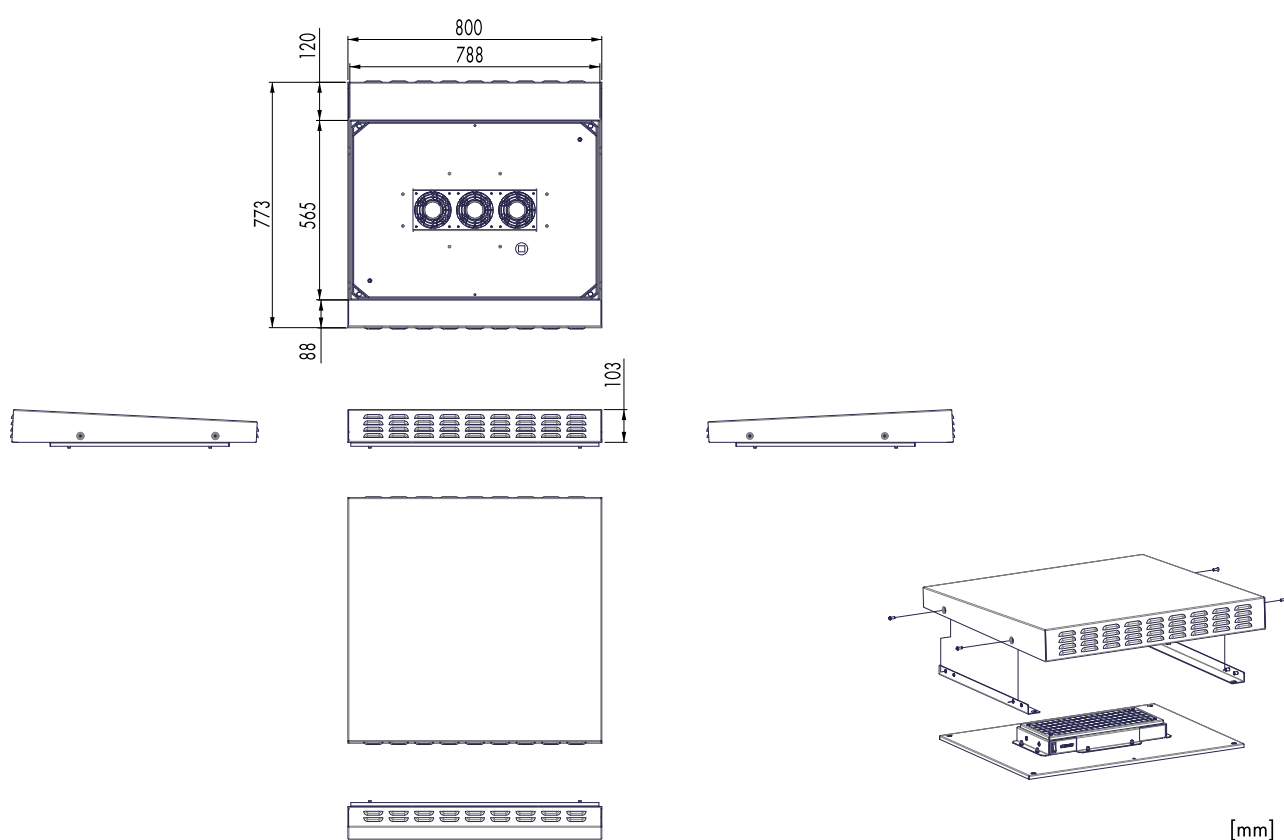

OPIS	KAT. BROJ
Krović s ventilatorom (s filterom) 540m ³ /h, 800x600mm (ŠxV) Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX208060 i outdoor ormar KCOX208060	KCRC8060F